

# SD-H

## Honeycomb Dehumidifier

# SHINI EUROPE



**Digital controller**  
has communication  
ModbusRTU RS-485




**Dew point sensor**  
gives a possibility to check  
current dew point  
of drying air (optional)



**Measurement point**  
gives a possibility to fast  
measure of current dew  
point by using portable dew  
point device  
(optional)



**Siemens contactors**  
from Sirius series ensures  
uninterrupted operation  
of the machine components

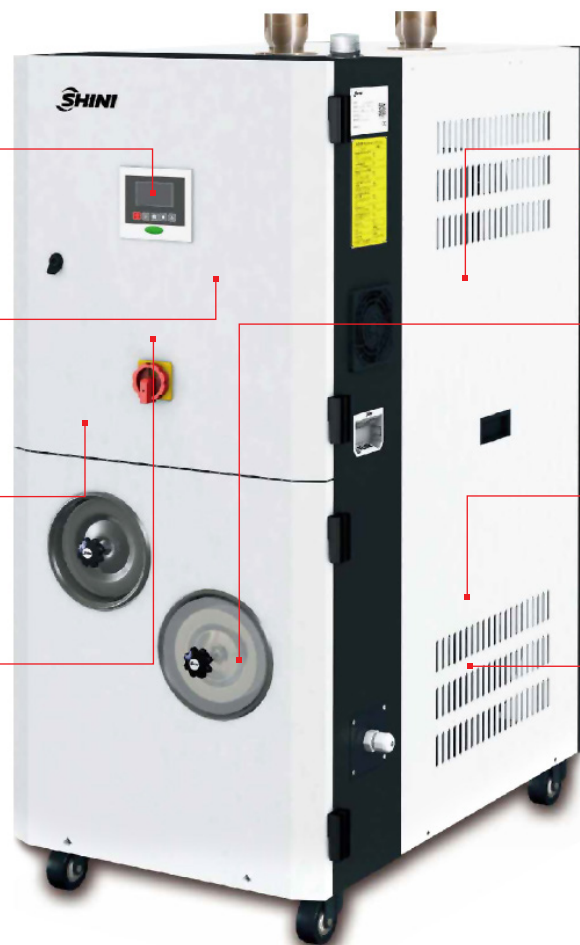

**Molecular sieve**  
low and constant dew  
point temperature  
to -40°C



**Set of filters**  
ensures safety  
and clean dry air  
stream



**Ring blowers**  
guarantee the correct  
flow of air, required  
for drying and  
dehumidification process



**Heat exchanger**  
provides a fast cooling  
down of the molecular  
sieve after the hot  
regeneration process

