


SHD-U-SL

Hopper Dryer



Stainless steel

All material contact surface are made of SUS201 to ensure no contamination to processing materials



Transport hooks

the dryer can be very easily lifted up and placed on a correct spot



Inspection door

gives a possibility for fast cleaning of hopper interior



Hot air diffuser

Special down blowing air pipe design helps evenly spread the hot air and improves drying efficiency




Magnetic base (optional)

can effectively separate metal scraps out to avoid material contamination



Hot air recycler (optional)

ensures a lower energy consumption and clean air in factory

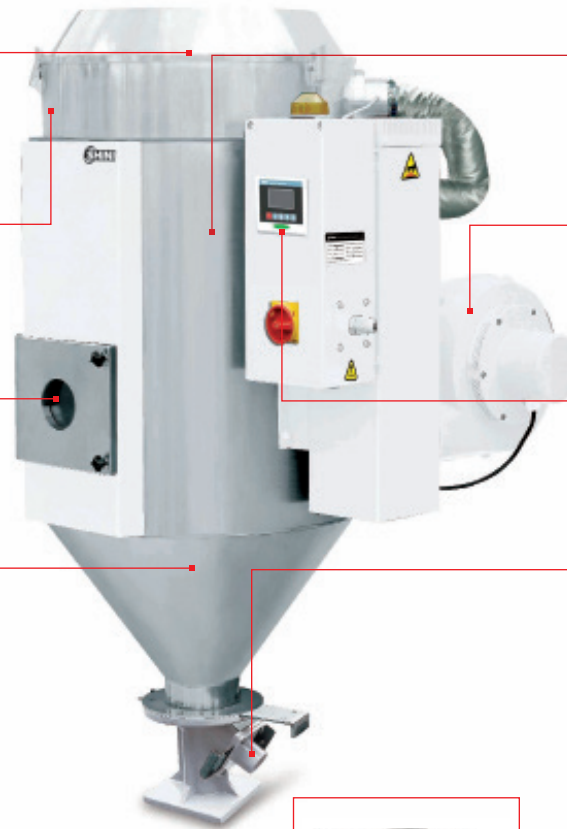

Floor Stand (optional)

support dryer, easy for installation and transportation



Insulated hopper

Double wall design with insulation cotton inside, can ensure great energy savings



Adjustment flange

gives a possibility to reduce air flow



New controller

Customer friendly LED display with 7-day timer and P.I.D for precisely control temperature



Standard base

ensures an easy installation directly on the injection machine throat



Material suction box (optional)

suitable for material suction by single or double suction needle 1,5" or 2"



Hopper Magnet (optional)

absorbs metal scraps in the material to avoid the damage of injection machine moulding screw

